

AUSSIE QP OWNERS MANUAL



**Aussie Fire Pumps,
High Pressure Ultralites,
Transfer & Trash Pumps**

Revision: #11 (Dec 2023)



Aussie Pumps



Quality
ISO 9001

SAI GLOBAL

Aussie Pumps ... Reliable Products, Reliable People

Australian Pump has developed a reputation for innovation and quality that has led to a rapid market acceptance both in Australia and throughout the world. Aussie Pump products are used in Europe, United States, throughout South East Asia and the Pacific region. Our rapid growth is based on five simple principles.

- **Performance.**
- **Quality**
- **Value**
- **Prompt Delivery**
- **After Market Support**

To provide through-life support through well trained, professional and motivated distribution team both in Australia and throughout the World.

TABLE OF CONTENTS

Safety Alert.....	3
Start up & installation details	4
Easy service data	5
Troubleshooting	6
Warranty terms	7

Keep this owner’s manual handy so you can refer to it at any time. The Aussie Pump Owner’s manual is considered a permanent part of the pump and should remain with it if resold.

The information and specifications included in this publication were valid at the time of printing however, Australian Pump Industries reserves the right to discontinue or change the specifications or design any time without notice

and without incurring any obligation.

This manual is accompanied with the appropriate engine manual. Please refer to this for details of starting & stopping the engine and for its maintenance & care.

BATTERY (electric start units)

Batteries are not supplied with electric start units.

2" & 3" pumps (Honda GX200, Yanmar L48)
(models QP205SE, QP209, QP303, QT203T, QP300T)

Require a 120 CCA battery. (Size of mounting tray ... 200 x 130mm)

3" & 4" pumps & twin impeller models (Honda GX390, Yanmar L100)
(models QP310, QP310SL, QP310SX, QP402, QP402SL, QP402SX, QP301T, QP40T & QP602)

Honda units require a 180 CCA battery (Size of mounting tray ... 210 x 135mm)

Yanmar units require a 220 CCA battery (Size of mounting tray ... 218 x 140mm)



NOTE: QPT405SLT & QP602 only

These two models use a sealed oil chamber to lubricate the mechanical seal. **Add oil to chamber before starting the pump** (250cc—300cc, viscosity ISO32 or ISO46). Check oil level before each use, via sight glass, and top up oil as required.



SAFETY ALERT



To get the best out of your Aussie Pump these important warning notices need to be observed.



Before starting the pump read Pump Operators manual.



Please note that this pump manual does not include full operation or maintenance instructions for the engine. Refer to the engine manufacturer's manual supplied.

- △ **No oil is supplied with the engine.** Oil must be added in accordance with the engine manufacturer's instructions. (Relevant to four stroke engines only).
- △ Four stroke petrol engines supplied with Aussie Pump products use unleaded gasoline.
- △ **Pump must be primed** before starting. Fill pump body with liquid. Pump must not be allowed to run without liquid passing through the casing. DO NOT run pump either dry or with insufficient water supply. Pump supply or delivery lines must not be shut off.
- △ **Do not use the pump in a gaseous or hazardous environment** or near combustible material.
- △ **Do not use the pump in an enclosed area,** engine exhaust could build up and cause asphyxiation.
- △ **Do not refuel engine while operating.** Shut engine down before refueling.
- △ **Do not start engine if there is a possibility that water has frozen in pump or pipework.**
- △ **Some engine components will get hot during operation.** Do not touch engine components while engine is running or immediately after operation. For details check engine operator's manual.
- △ **Do not let children operate the pump.**
- △ **Familiarise yourself with the pump's controls** with emphasis on how to stop the pump quickly.
- △ **Always refuel in a well ventilated area,** do not smoke or allow flames or sparks in the refueling area or where gasoline is stored.
- △ **Do not over fill the fuel tank,** as spilled fuel can ignite if it comes into contact with hot engine parts or sparks. After refueling, make sure tank cap is closed properly and is secure.
- △ **Protect your pump from pressure spikes** by installing a by-pass or pressure relief valve if sudden shut off of the water flow on the discharge line is likely to occur.
- △ If your pump is fitted with an AGM dry cell battery gel battery, the battery **must** be recharged using a **Trickle Charge battery charger**. Contact a battery specialist for further assistance.
- △ **Do not pump hydrocarbons** with this pump.

△ **Do not run pump dry.**

For maximum performance, efficiency and life, operate the pump at the best efficiency point ... 85% of total pump head.

START UP & INSTALLATION

When installing an **Aussie QP self priming pump**, always remember that the closer the pump is placed to the source of supply the better the performance will be.

To ensure maximum capacity select a site that will permit the shortest and most direct suction piping and smallest vertical lift.

Set the pump on firm and level foundations with good drainage, in an area not subject to flooding.

Connecting the Suction Hose

Use commercially available hose, hose connector and hose bands. The suction hose must be of reinforced non collapsible construction, suction hose length should not be longer than necessary as the longer the suction hose, the less delivery performance of the pump. Self priming time is also proportional to suction hose length!

A suitably sized strainer MUST always be used on the end of the suction hose to keep solids out of the pump.

Check carefully to make sure there are no air leaks in the suction line and that the rubber gaskets are in good condition. Any minute leak in the suction line will cause loss of suction prime

Connecting the Discharge Hose

Use a commercially available hose, hose connector and hose bands. A large diameter hose is most efficient. Long, small diameter hoses will increase friction loss and reduce pump performance and adversely affect performance.

Priming

Remove the priming cap at the top of the delivery port. Fill pump body with water and refit priming cap tightly.

Open gate valve on delivery line if fitted, turn on engine and run at full speed during priming.

Allow up to 3 minutes to prime.



The pump must be primed before starting. Fill pump bowl.

Never attempt to operate pump without priming first. Extended dry operation will destroy pump seal.

If unit has been run dry, stop the engine immediately, allow the pump to cool before adding priming water.

Hydraulic Shock

If the water flow is suddenly terminated by closing a valve, without stopping the pump first, it can cause hydraulic shock. This can travel back to the pump causing serious damage. To prevent pump damage install a bypass or safety relief valve.

Aussie Safety Relief Valve. Fits to priming port (suitable for high pressure pumps)



10 BAR ...

suits Fire Chief, 3" & 4" SX pumps, & twin impeller pumps (s/code Q078908-3408)

TIP: AVOID USING 'SUDDEN SHUTDOWN' VALUES to reduce hydraulic shock.

Pressure relief valves are recommended for high pressure pumps. However, they offer limited protection from hydrostatic shock. It is the responsibility of the installer to ensure that a suitable valve is used according to the application. A pump damaged caused by a pressure spike is not covered by warranty, even if a pressure relief valve has been fitted.

EASY SERVICE DATA

Cavitation

Your pump is cavitating if knocking noises and vibrations can be heard when it is operating. If you continue to operate your pump when it is cavitating, it will be damaged.

How to avoid cavitation

- Minimise the number of valves and bends in suction line
- Suction length should be as short as possible
- Suction pipe should be at least the same diameter as the pump inlet connection
- Use long radius bends
- Do not allow air into the suction line
- Ensure adequate submergence, at least 5.3 times the suction hose diameter

Handy service hints

1. To maximize pump life, **drain pump after use** and flush out with clean, fresh water. **NOTE:** Water freezing in the pump chamber will damage the casing. This is not covered under warranty.
2. Read engine manufacturer's owner's manual thoroughly and service as recommended.
3. The mechanical seal in your pump is a wearing part. Mechanical seal failure due to normal wear and tear is not covered under Aussie Pumps warranty.

It is the owner's responsibility to ensure the integrity of the mechanical seal in your Aussie QP pump set is checked regularly. In the event that your pump is leaking water at the back end, (this can be visibly checked through the safety weep hole on the back casing of pump), you must replace the mechanical seal. Failure to do so could cause water ingress in your engine and voids warranty.

4. Store pump in a dry, safe location when not in use.

5. If storing for long periods, drain fuel from engine and tank.
6. Viton seals are available for pumping a wide range of liquids. These include some agricultural chemical products. For details of compatibility, see your local Aussie Distributor. NOTE: Fire damaged Viton elastomers emit a dangerous acid that can cause serious health effects.
7. Aussie Quik Prime pumps are specifically designed to pump water. Pumping other liquids may shorten life and impact on warranty. See above clause.
8. Pumping water containing solids will prematurely wear pump components, and may impact warranty.
9. Ensure that the correct size strainer is installed on the suction hose at all times, even on trash pumps.
10. Trash pumps; do not attempt to pump liquid that contains more than 25% solid material.

Service/Installation hints

Hydrostatic Shock



Prevent hydrostatic shock by using thick planking either side of the hose where it crosses roadways.

Strainer Placement



Place strainer on bed of rocks or inside an old bucket. Alternatively use a pontoon or float to keep pump strainer clear of debris.

TROUBLESHOOTING

Practically all breakdowns can be prevented by proper handling and maintenance inspections, but in the event of an issue check the Troubleshooting information shown below.

PUMP TROUBLESHOOTING		
SYMPTOM	POSSIBLE PROBLEM	SOLUTION
Pump does not suck water after priming	Not enough priming water in the housing?	Add more water
	Engine speed too low?	Increase throttle
	Strainer plugged?	Clean strainer
	Suction hose damaged?	Replace or repair hose & clamps
	Air leak at suction port?	Check that fittings are tight & sealed, ensure hose coupling seal is in good condition.
	Pump is located too high above water line?	Move pump closer to water
	Debris collecting in pump housing?	Clean pump housing
	Too much distance between impeller and volute.	Adjust clearance by adding shims or replace impeller. Min. .010" -Max. .020
	Water leaking out weep hole between pump and engine?	Check condition of mechanical seal & gaskets, between pump end and engine housing
Pump takes in water, little or no discharge.	Suction lift or discharge head too high.	Check hose/pipe installation
	Engine speed too low?	Increase throttle speed
	Suction strainer partially plugged?	Clean strainer
Suction hose leaks at inlet	Impeller/volute worn?	Adjust clearance by adding shims or replace impeller/volute
	Fittings/clamps are not sealed properly?	Tighten, replace or add clamp. (Keep extra seals on pump)
Discharge hose does not stay on coupling.	Hose diameter is too large?	Use smaller diameter hose or replace hose
	Pressure too high?	Check pressure, add additional clamp
Impeller does not turn, pump is hard to start.	Hose kinked or end blocked?	Check hose
	Impeller jammed or blocked?	Open pump cover and clean dirt and debris from inside housing
	Impeller and volute binding?	Adjust clearance by removing shim from behind impeller
Water leaking from Mech Seal	Defective engine?	See Engine Owners Manual
	Pump has been run dry	Replace Mech Seal

EMERGENCY USE ONLY ... low oil cut-out on Honda engines can be disabled by disconnecting the yellow wire that leads to the starter. NOTE engine warranty may be affected.

Engine Troubleshooting; refer to engine manufacturer's manual

AUSSIE'S FREE EXTENDED WARRANTY

Engine Warranty

Warranty for engines fitted to Aussie Pump products is the responsibility of the engine manufacturer or his representative and subject to their terms and conditions, and operating instructions included with the product.

Aussie QP 5 year warranty

Australian Pump warrants all Aussie QP self priming centrifugal pumps, whether used for domestic or commercial applications, to be free of faulty workmanship or material for a period of 5 years from the date of supply to the end user.

Aussie will replace or repair, at our discretion, any faulty pump free of charge subject to the following conditions.

The Aussie Pump 5 year warranty naturally does not cover the following:-

1. Normal wear and tear, misuse, improper installation, negligent handling, failure to follow operating instructions or to carry out maintenance.
2. Pumping of chemicals, salt or corrosive fluids.
3. Unauthorised repair or attempted repair (i.e. not authorised by Australian Pump)
4. Shipping or transit damage
5. Use of non-genuine parts.

The warranty is valid only for the original consumer purchaser and non transferable.

Note:- This warranty is limited to the cost of the product and does not include third party costs including pump installers, plumbers etc. unless expressly authorised by Australian Pump Industries in writing.

Warranty Claims

When claiming warranty, consumers must give evidence to the local Aussie Pump Service Station of date of purchase, model and serial number of the product, and the claimant's name, address and telephone number.

To claim warranty, you will need to provide the following data:-

1. Written confirmation of your claim.
2. Proof of purchase.
3. Where necessary, full installation data, including installation design drawings where appropriate.

Costs generated by a service call from an authorised Aussie Pump Service Agent will incur a travel, removal and re-installation fee if the Service Agent is required to judge warranty issues.

In the event that the product is not readily accessible for inspection, warranty service will be denied or suspended pending availability of the whole item.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

The benefits under the Aussie Pump warranty are in addition to other rights under Australian Consumer Law.

Need Assistance?

Your local Aussie Pump dealer will be able to assist you with any questions you may have, alternatively you are welcome to contact our customer service department on 02 8865 3500

Name of Dealer purchased from: _____ Phone: _____

Aussie Quik Prime Range



Ultralites ...
Portable pumps



Fire Pumps ...
World's best portable range



Twin Impellers ...
Extra performance



Transfer pumps ...
Move water fast



Trash pumps ...
Dirty water solutions



Marine pumps ...
Corrosion resistant


Aussie Fire Pumps

Download the Aussie Bushfire Survival Guide for instructions on setting up & using Aussie fire pumps. www.aussiepumps.com.au

To find your local authorised Aussie QP Distributor, visit the Aussie pump website.

Aussie Pumps

Reliable Products ... Reliable People

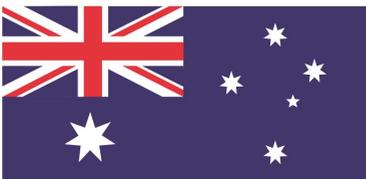

WE'RE FOR
AUSTRALIA

Australian Pump Industries Pty Ltd
8 Solent Circuit, Norwest NSW 2153
Ph: (02) 8865 3500
aussiepumps.com.au