

- Five year pump end warranty
- Primes fast from 7.6 metres
- Honda petrol or Yanmar diesel engines
- Single piece, heavy duty closed or open impeller
- Replaceable flanged suction port & discharge
- Big belly body... for fast priming & extra performance
- Marine grade aluminium body
- Easy access priming port
- Optional spark arrester

- » Great quality ... use with confidence
- Ready to pump in the minimum amount of
- Tried and proven with established service networks throughout the world
- Pumps more fuel at high pressure
- Easy to service check valve, allows for option of 2" or 3" ports to be fitted
- » Larger passages mean more efficiency & lower fuel costs
- Corrosion resistant, long life
- Convenient & safer
- For added safety

Fuel Chief Honda

Specifications

	1
HONDA PETROL DRIVE	3 year GX engine warranty

Inlet/Outlet	Model		НР	Pump PSI	Max Head (m)	Max Flow (lpm)	Frame
2" inlet	Fuel Chief Honda	QP205SE	5.5 or 6.5	107	75	450	skids & handle
3 way outlet 2 x 1"& 1 x 1½"	Fuel Master 2 Honda	QP209	5.5	47	33	800	roll frame
3" x 3"	Fuel Master 3 Honda QP30	OD202	5.5	45	32	1000	roll frame
		QF303	6.5				

YANMAR DIESEL DRIVE

2 year engine warranty

	-					
Inlet/Outlet	Model		НР	Pump PSI	Max Head (m)	Max Flow (lpm)
2" inlet 3 way outlet 2 x 1"& 1 x 1½"	Fuel Chief Yanmar	QP205SE L48	4.8	85	60	400
	Fuel Master Yanmar	QP209 L48		40	28#	700#
3" x 3"	Fuel Master 3" Yanmar	QP303 L48		43	30	1050

All priming & performance data based on water,

Performance with 2" outlet

YANMAR OPTIONS....

- **Full frame**
- Stop/start solenoid
- **Emergency stop**



FUEL PUMPS TO 4" ALSO AVAILABLE (1,500 LPM FLOW) ... CALL FOR DETAILS

Due to our program of continuous product development the manufacturer reserves the right to alter specifications without notice

Australian Pump Industries Pty Ltd P: 02 8865 3500 www.aussiepumps.com.au Page 1



AUSSIE QUIK PRIME DIESEL FUEL TRANSFER PUMPS

Construction:

Front case Marine grade aluminium

Volute Marine grade aluminium

Back plate Marine grade aluminium

Mechanical seal Viton®

Outlet Marine grade aluminium

Casing bolts Zinc plated steel

Check valve Viton®

Priming & drain

plugs

ain Polycarbonate

Viton®

Casing, priming &


drain plug o-rings

Finish Brushed aluminium

Impeller Marine grade aluminium,

closed type

Dimensions:

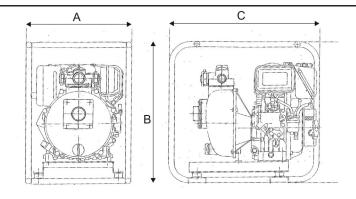


Basic Models (with full frame, no solenoid)	Engine	A Width (mm)	B Height (mm)	C Length (mm)	Weight (kg)
Fuel Master Honda 2"	GX160	542	459	523	30
Fuel Master Honda 3"	GX160	542	459	523	30
Fuel Chief QP205SE Yanmar	L48	445	510	550	58
Fuel Master QP209 Yanmar	L48	445	510	550	58


Models (with skids & handle)

Fuel Chief Honda	GX160 or GX200	393	478	491	30
ruei Cillei Hollua	GX100 01 GX200	333	4/0	491	30

Performance Curve:



Golden Rule Operate pump at the best efficiency point ... 85% of max pump head



NOTE: performance shown with 2"outlet or 3" outlet, not 3 way tree

For **electric drive ATEX** certified fuel oil transfer pumps see **separate spec sheet**





Due to our program of continuous product development the manufacturer reserves the right to alter specifications without notice