

AUSSIE GMP PUMPS **ENGINE DRIVE, CORROSION RESISTANT ... 3 YEAR PUMP WARRANTY**



- Heavy duty cast construction
- Big open impeller
- Self primes from 6 metres
- Replaceable suction cover
- Available with either Honda petrol or, Yanmar or Kohler diesel drive units
- Mech seals on bronze & stainless steel pumps... carbon/alumina faces, nitrile rubber seal & 316 stainless steel casing
- Viton seals option, specify a stainless steel pump with Viton seals for corrosive applications like AdBlue® & chemical transfer (see below)

available with a close coupled diesel engine for a wide range of applications.

Available in either Ni Al bronze or 316 grade stainless steel configurations they are suitable for both high flow and high pressure tasks.

The pumps are driven by top quality Yanmar or Kohler diesel drive units. All engines offered spec sheet. are top quality international brands, sold and

Aussie GMP self priming centrifugal pumps are supported by a worldwide service network and backed by two year engine manufacturer's warranty.

> Stainless steel pumps are corrosion and abrasion resistant and suitable for extremely aggressive liquid applications.

Cast iron options also available, see separate

Benefits

- Long, trouble free life
- Pumps solids in suspension
- Ready to pump in minimum amount of time
- Pump clean out without pipe work dismantling
- Tried and proven with established service networks throughout Australia and the world
- Flexibility of handled liquids
- Protects pump from wear, cuts operating costs

Applications:

Marine Applications ... Ni Al bronze

- Deck wash down
- Bilge pump out
- Salvage pump
- Marine fire fighting

Industrial/Mining Applications ... 316 cast stainless steel

- Aggressive water
- Sewage handling
- Acid & solvent pumping
- Ag chemical transfer
- Industrial food waste
- AdBlue® transfer

Specifications

Inlet/ Outlet	Model	CAT no.	Engine	НР	RPM	Total Head (m)	Capacity (I/m)	Solid size (mm)
NI AL bronze - Marine Grade stainless steel plugs & fasteners								
2" x 2"	G2TMK-A/B	AA1C	YANMAR e/start	10	3000	34	400	6
2" x 2"	B2KQ-A/B	AA3B	YANMAR recoil or electric start	4.8	3000	19	450	16
3" x 3"	B3KQ-A/B	AA4B	YANMAR recoil or electric start	7	3000	16	840	27
4" x 4"	B4KQ-A/B		YANMAR e/start	10	3000	15	1650	35
Stainless Steel —316 Grade for corrosive & abrasive applications								
2" x 2"	B2KQ-A/X	AA2B	YANMAR recoil or electric start	4.8	3000	20	440	16
3" x 3"	B3XR-A/X	AA2C	YANMAR e/start	10	3000	24	1250	24

Rejuvenation kits...

Contain gaskets, mech seal, counterface & complete check valve to make servicing these pumps a breeze.



Optional Accessories:


- Heavy duty galvanised roll frame (standard on diesel drive)
- Heavy duty suction hoses
- Medium pressure lay flat delivery hose, working pressure 100 psi
- High flow diesel transfer fuel
- Carbon ceramic, silicon carbide, tungsten carbide or Viton seals available
- Strainers and couplings
- Battery pack on electric start models



Due to our program of continuous product development the manufacturer reserves the right to alter specifications without notice



AUSSIE GMP PUMPS ENGINE DRIVE, CORROSION RESISTANT ... 3 YEAR PUMP WARRANTY

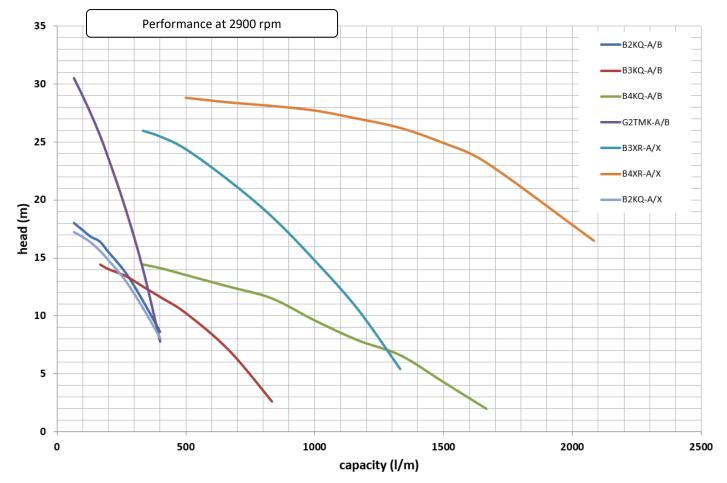

Curves should be used as a guide only, for detailed performance curves contact Aussie Pumps